

Universal Blue Heat/PCI 485

Applications

Universal Blue Heat/PCI 485 adapters offer up to eight asynchronous RS-485/422 and RS-232 serial ports for data collection devices, barcode readers, time clocks, scales and other industrial automation equipment. Universal Blue Heat/PCI 485 adapters are ideal industrial strength solutions for control and automation applications requiring single node or multi-drop communications over short or long distances using 3.3V or 5V PCI bus compatible computers.

Features

- Supports data communications speeds up to 921.6 Kbps.
- 16C864 UARTs control each port providing 128 bytes of TxD/RxD FIFO buffers.
- Dual mode interrupt scheme: PCI and ISA modes with status register (for software that supports this feature). Improves performance and compatibility.
- Supports three RS-485 modes:
 - Full Duplex with RTS/CTS flow control.
 - Half Duplex with auto TxD echo cancellation.
 - Multi-drop Slave offers 4 wire full duplex communications of multi-drop devices.
- Independent port configuration with baud rates from 14 bps to 921.6 Kbps; data bits of 5, 6, 7 or 8; stop bits of 1, 1.5, or 2, and odd, even, or stick parity.
- A choice of a DB-9 and DB-25 cable harness connector or DB-9 external connector box or RJ-45 module (custom connector solutions offered as well).
- Multi-strike surge protection; IEC1000-4 compatible on all signals, all ports.
- Easy installation with no DIP switches or jumpers to set - full Plug and Play.

Benefits

High Speed, High Performance Communications

Achieve rapid data transfer rates up to 921.6 Kbps. State of the art 16C864 quad UARTs with 128 bytes of transmit and receive FIFO buffers offload interrupt handling and buffering from the main CPU, thus improving overall system performance.

Hardware Flexibility

Universal Blue Heat/PCI 485 offers hardware flexibility and adaptability for your application. You can configure each port's baud rate, parity, data and stop bits independently and various connector options are offered to suit your needs. Blue Heat/PCI 485 supports three RS-485 modes: Full Duplex with RTS/CTS flow control; Half Duplex with auto TxD echo cancellation; and Multi-drop Slave for four wire full duplex communications of multi-drop devices. Several models with a combination of RS-232 ports are also available.

Hardware Reliability


Universal Blue Heat/PCI 485 adapters provide IEC1000-4 compatible surge suppression on all signals, all ports. Protection against electrical disturbances, spikes and surges means fewer failures, less downtime.

Software Compatibility

Universal Blue Heat/PCI 485 boards with its dual mode interrupt scheme offer compatibility with existing standard serial drivers for many of the most popular operating systems such as: Linux, QNX, SCO Unix, Solaris and Windows 95/98/ME/XP/NT/2000. This provides you with more software flexibility for your communication needs.

Easy to Use

To get you up and running in no time, Universal Blue Heat/PCI 485 adapters come ready for simple installation with no DIP switches or jumpers to set. Included are board, cable assembly, driver software and a comprehensive manual.

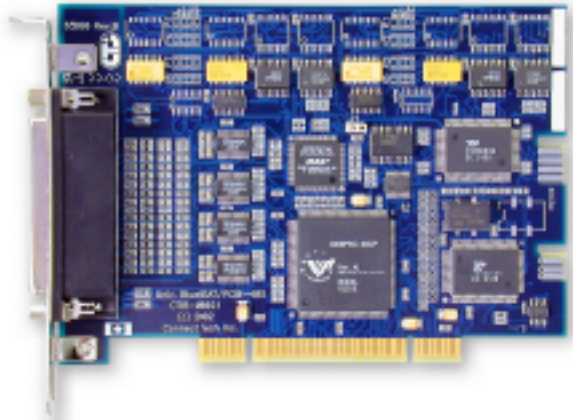

Warranty and Service

Connect Tech, an ISO 9001 registered company, has provided high performance communication solutions since 1985, building and testing products to meet high standards of quality and reliability. Universal Blue Heat/PCI 485 adapters come with a one year warranty.

Specifications

	Universal Blue Heat/PCI 485
Number of ports	<i>Universal Blue Heat-8/PCI 485:</i> 8 <i>Universal Blue Heat-4+4/PCI 485:</i> 8
Electrical Interface	<i>Universal Blue Heat-8/PCI 485:</i> 8 ports RS-485/422 <i>Universal Blue Heat-4+4/PCI 485:</i> 4 ports RS-232 4 ports RS-485/422
Connectors	<i>8 port models:</i> DB-9 or DB-25 male cable or connector box or RJ-45 module
Control Signals	<i>RS-232:</i> DTR, DSR, RTS, CTS, RI, TxD, RxD, DCD <i>RS-485:</i> TxD \pm , RxD \pm , CTS \pm , RTS \pm
Baud Rates	14 bps - 921.6 Kbps
I/O Addresses	Plug and Play resources require two 256 byte I/O spaces
Interrupts	Plug and Play resources require one interrupt
Memory Addresses	Plug and Play resources require a megabyte of memory address space
UART Type	16C864 quad UARTs c/w 128 byte TxD/RxD FIFO buffers
Surge Suppression	500 watts (8x 20 μ S), IEC1000-4 compatible on all signals, all ports
Dimensions	Height: 110.50 cm Length: 10.00 cm Width: 1.50 cm
Power Requirements	+3.3V or +5V
Environmental Requirements	Temperature: (operating) 5° to 70° C (storage) -65° to 150° C Humidity: 5 - 95% non-condensing
Bus	PCI with read and write FIFO buffers
Regulatory Approvals	FCC Class A ICES-003; EN50082-1 EN55022 Class A
Software Compatibility	Linux, QNX, SCO Unix, Solaris, Windows 95/98/ME/XP, and Windows NT/2000 (contact Connect Tech for most current list)
System Requirements	one available 3.3V or 5V PCI slot

Please call Connect Tech for information about other Universal Blue Heat/PCI 485 models

© 2002, Connect Tech Inc.

All other brands & product names are trademarks or registered trademarks of their respective holders



Connect Tech Inc.

42 Arrow Road
Guelph, Ontario
Canada N1K 1S6
Tel: 519-836-1291
800-426-8979
Fax: 519-836-4878

Email: sales@connecttech.com
URL: http://www.connecttech.com

Quality and Reliability since 1985



CTIX-00017, Rev. 0.00
Printed 09/02

